

IP-4200S-HDW

2Megapixel Full HD Network Small IR Dome Camera



Features

- 1/2.8" 2Megapixel progressive scan Exmor CMOS
- H.264&MJPEG dual-stream encoding
- 25/30fps@1080P(1920×1080)
- DWDR, Day/Night(ICR), 3DNR,AWB,AGC,BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 3.6mm fixed lens (6mm optional)
- Max. IR LEDs Length 20m
- IP66, PoE

Technical Specifications

| | |
|--------------------------|---|
| Model | IP-4200S-HDW |
| Camera | |
| Image Sensor | 1/2.8" 2Megapixel progressive scan Exmor CMOS |
| Effective Pixels | 1920(H)x1080(V) |
| Scanning System | Progressive |
| Electronic Shutter Speed | Auto/Manual, 1/3(4)~1/10000s |
| Min. Illumination | 0. 1Lux/F1.6 (Color), 0Lux/F1.6(IR on) |
| S/N Ratio | More than 50dB |

IP-4200S-HDW


| | | |
|------------------------|--|--------------------------|
| Video Output | N/A | |
| Camera Features | | |
| Max. IR LEDs Length | 20m | |
| Day/Night | Auto(ICR)/Color/B/W | |
| Backlight Compensation | BLC / HLC / DWDR | |
| White Balance | Auto/Manual | |
| Gain Control | Auto/Manual | |
| Noise Reduction | 3D | |
| Privacy Masking | Up to 4 areas | |
| Lens | | |
| Focal Length | 3.6mm (6mm optional) | |
| Max Aperture | F1.8(F1.6) | |
| Focus Control | Manual | |
| Angle of View | H:88°(53°) | |
| Lens Type | Fixed lens | |
| Mount Type | Board-in Type | |
| Video | | |
| Compression | H.264/ MJPEG | |
| Resolution | 1080P(1920×1080) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240) | |
| Frame Rate | Main Stream | 1080P/720P(1 ~ 25/30fps) |
| | Sub Stream | D1/CIF(1 ~ 25/30fps) |
| Bit Rate | H.264: 32K ~ 8192Kbps | |
| Audio | | |
| Compression | N/A | |
| Interface | N/A | |
| Network | | |
| Ethernet | RJ-45 (10/100Base-T) | |
| Wi-Fi | N/A | |

IP-4200S-HDW




| | |
|----------------------------|--|
| Protocol | IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour |
| Compatibility | ONVIF,PSIA,CGI |
| Max. User Access | 20 users |
| Smart Phone | iPhone, iPad, Android, Windows Phone |
| Auxiliary Interface | |
| Memory Slot | N/A |
| RS485 | N/A |
| Alarm | N/A |
| PIR Sensor Range | N/A |
| General | |
| Power Supply | DC12V, PoE (802.3af) |
| Power Consumption | Max 4W |
| Working Environment | -30°C~+60°C, Less than 95% RH |
| Ingress Protection | IP66 |
| Vandal Resistance | N/A |
| Dimensions | Φ113.6mm×85.8mm |
| Weight | 0.29kg(0.45kg with packaging) |

IP-4200S-HDW

Dimensions (mm)

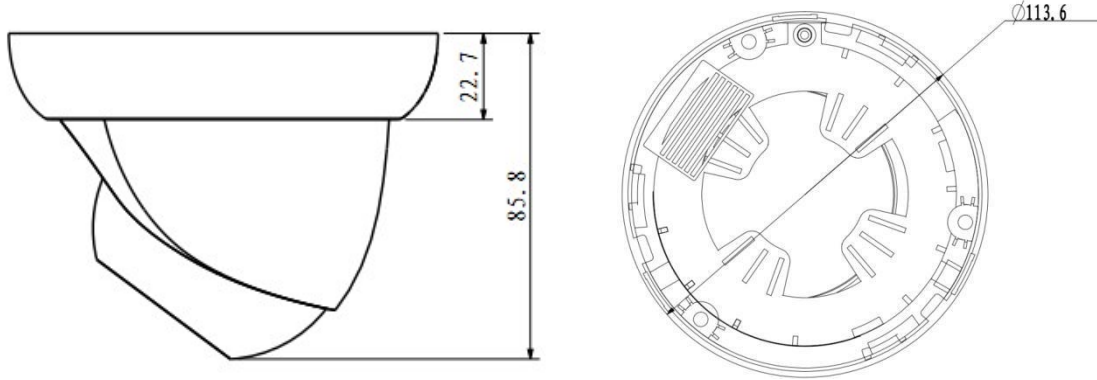

Accessory (optional)

| | | |
|---|---|---|
|  |  |  |
| AC-200W | AC-130 | AC-122 |

社名 / 新光 株式会社
SK-COMPANY CO.,LTD

本社所在地 / 〒173-0032
東京都板橋区大山西町 2-3 SKビル 1F

TEL / +81-8032785551
FAX / +81-33972-0689

Distributor: