

# NVR-4K-64-616DR

## 64 Channel Super 4K Network Video Recorder



### Features

- Max 64 channel IP cameras connection
- Max 384Mbps incoming bandwidth
- Up to 12Mp resolution preview& playback
- 1 VGA+2 HDMI
- Support 16 hot-swap HDDs
- Support RAID 0/1/5/6/10/50/60
- Support N+M hot standby
- Support iSCSI & Mini SAS to expand storage space
- Compatible with SDK and seamless integrated to other platforms
- Support Multi-brand network cameras: Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek and etc.
- ONVIF Version 2.4 conformance
- Redundant power supply module adopted (DH-NVR616R-64 &DH-NVR616DR-64)
- Front LCD display (DH-NVR616D-64 & DH-NVR616DR-64)

### Technical Specifications

<b>Model</b>	<b>NVR-4K-64-616DR</b>
<b>System</b>	
Main Processor	Intel Processors
Operating System	LINUX
<b>Video &amp; Audio</b>	
IP Camera Input	64 channel

## NVR-4K-64-616DR


Two-way Talk	1channel Input, 1channel Output, RCA
<b>Display</b>	
Interface	2 HDMI (up to 3840x2160), 1 VGA
Resolution	3840×2160, 1920×1080, 1280×1024, 1280×720, 1024×768
Multi-screen Display	The 1 <sup>st</sup> screen: 1/4/8/9/16/25/36
	The 2 <sup>nd</sup> screen: 1/4/8/9/16
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
<b>Recording</b>	
Compression	H.264/MJPEG
Resolution	12Mp, 8Mp, 6Mp, 5Mp, 3Mp, 1080P, 1.3Mp, 720P & etc.
Record Rate	256Mbps
Bit Rate	1~ 20Mbps
Record Mode	Manual, Schedule(Regular(Continuous), MD(Video detection: Motion detection, Camera blank, Video loss), Alarm), Stop
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
<b>Video Detection &amp; Alarm</b>	
Trigger Events	Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
Alarm Input	16ch, low level effective, green terminal interface
Relay Output	8ch, Relay contact(1A@24VDC), NO/NC programmable, green terminal interface
<b>Playback &amp; Backup</b>	
Playback	128Mbps in Raid 5 mode 64Mbps in single HDD mode
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device/Network/Internal SATA burner/eSATA Device
<b>Network</b>	
Interface	4 RJ-45 ports (10/100/1000Mbps)
Ethernet Port	4 Ethernet ports joint working or 4 independent 1000Mbps Ethernet ports
Optical Fiber Interface	2 Giga Optical fiber interface

## NVR-4K-64-616DR

Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search(Support IP camera, DVR, NVS and etc.)	
Max. User Access	128 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
<b>Storage</b>		
Internal HDD	16 SATA III ports, up to 96TB	
HDD Mode	Single, Raid 0/1/5/6/10/50/60 (Support global HDD hot-spare)	
<b>Auxiliary Interface</b>		
Front cover	Support hot swap, 7" inch HD LCD (1920x1080/1280x1024/1024x768) (Model -D&DR)	
USB	4 USB ports(3 USB2.0, 1 USB3.0)	
eSATA	1 eSATA port	
SAS	1 Mini SAS port	
RS232	1 port, For PC communication& keyboard	
RS485	1 port, For PTZ control	
<b>General</b>		
Power Supply	AC100V~240V, 50~60Hz	AC100V~240V, 50~60Hz , Redundant
Power Consumption	<51W (Without HDD)	
Working Environment	-10°C~+55°C/10%~90%RH/86~106kpa	
Dimension(W×D×H)	531.9mm ×485mm(with ears)×133.2mm	
Weight	17.45kg (without HDD)	
Installation	Rack-mounted	

# NVR-4K-64-616DR

## Dimensions (mm)

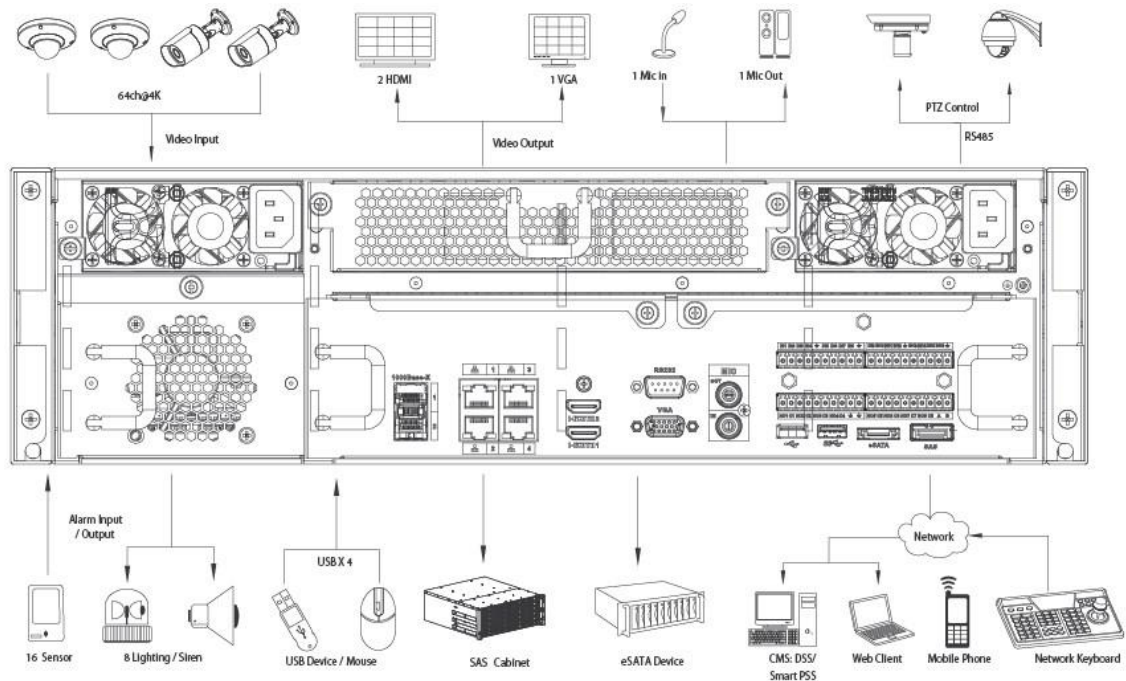

\*Takes NVR616R-64-4K as an example

社名 / 新光 株式会社  
SK-COMPANY CO.,LTD

本社所在地 / 〒173-0032  
東京都板橋区大山西町 2-3 SKビル 1F

TEL / +81-8032785551  
FAX / +81-33972-0689

Distributor:

