


ITK-ITO6210BW-ITH1550CH

7 Inch IP Kit

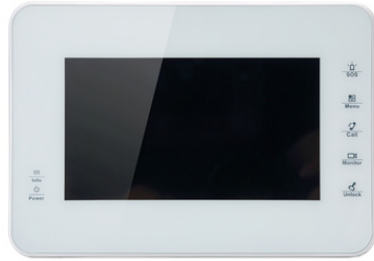

Features

- HD CMOS camera
- 7-inch capacitive touch screen, resolution 800×480
- IPC surveillance
- Alarm integration
- 2-Door control
- Remote intercom with mobile APP



Technical Specification

Video Outdoor Station

Model	ITO6210BW
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Image Sensor	1/4" 1MP CMOS
Lens	3.6mm
Angle of View	D:70° H:60°
Day/Night	Color Image
Audio	
Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Operation Mode	
Keypad	Single Touch Button
Reader	Mifare Card
Interface	
Door Control	2(1 relay out for main lock, 1 extended by access control module)
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive

Network Protocol	TCP/IP
------------------	--------

General

Ingress Protection	IP65
Tamper Switch	1
Installation	Surface
Material	Tempered Glass
Power	DC 12V, or supply directly by VTNS1060A
Power Consumption	Standby ≤1W, Work ≤10W
Working Temperature	-30°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	154.2mm×114.2mm×43.0mm
Weight	0.6Kg

Video Indoor Monitor

Model	ITH1550CH
System	
Main Processor	Embedded Micro Process
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	

LCD Screen	7" 800x480, Capacitive
------------	------------------------

Operation Mode

Input	Touch buttons
-------	---------------

Interface

Alarm In	6
Alarm Out	1
RS485	1

Network

Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP

General

Memory Slot	Micro SD, Max 32G
Installation	Surface
Power	DC 12V
Power Consumption	Standby $\leq 1.5W$, work $\leq 7W$
Working Temperature	-10°C~+55°C

Application

