

4/8CH 1080P Mini 1U HD DVR



Features

- > Support HD/Analog/IP Video input
- > H.264 dual-stream video compression
- > All channel 1080P realtime recording
- > HDMI/VGA simultaneous video output
- > 4/8 channel synchronous realtime playback, GRID interface & smart search
- > ONVIF Version 2.4 conformance
- > 3D intelligent positioning with PTZ dome camera
- > Support 1 SATA HDD up to 4TB, 2 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)

Technical Specifications

Model		HD-S2-7104H	HD-S2-7108H
System			
Main Processor		Embedded processor	
Operating System		Embedded LINUX	
Video			
Input		4 channel, BNC	8 channel, BNC
Standard	Analog	NTSC(525Line,60f/s),PAL(625Line,50f/s)	
	HDCVI	1080P/720P HDCVI Camera	
	IP	1080P/720P/D1/CIF IP Camera	

Audio	
Input	1 channel, RCA
Output	1 channel, RCA
Two-way Talk	Reuse audio input/output channel 1

Display	
Interface	1 HDMI, 1 VGA
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768, 800×600
Display Split	1/4 1/4/8/9
Privacy Masking	4 rectangular zones (each camera)
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording

Recording	
Video/Audio Compression	H.264/G.711
Record Rate	Main Stream: 1080P/720P/960H/D1(1~25/30fps)
	Extra Stream: CIF/QCIF(1~25/30fps), D1(1~6/7fps)
Bit Rate	96~6144Kb/s
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop
Record Interval	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300sec

Video Detection	
Trigger Events	Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank


Playback & Backup	
Sync Playback	1/4 1/4/9
Search Mode	Time/Date, MD & Exact search (accurate to second)

HD-S2-7104/7108H

Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode	USB Device/Internal SATA burner/Network	
Network		
Ethernet	RJ-45 port (10/100M)	RJ-45 port (10/100M/1000M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P	
Max. User Access	128 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
Storage		
Internal HDD	1 SATA port, up to 4TB	
Auxiliary Interface		
USB Interface	2 ports(1 Rear), USB2.0	
RS485	1 port, For PTZ Control	
General		
Power Supply	DC12V/2A	DC12V/3A
Power Consumption	10W(without HDD)	
Working Environment	-10°C ~+55°C / 10%~90%RH / 86~106kpa	
Dimension(W×D×H)	Mini 1U, 325mm×255mm×55mm	
Weight	1.5KG(without HDD)	

System Connection

HD-S2-7104/7108H

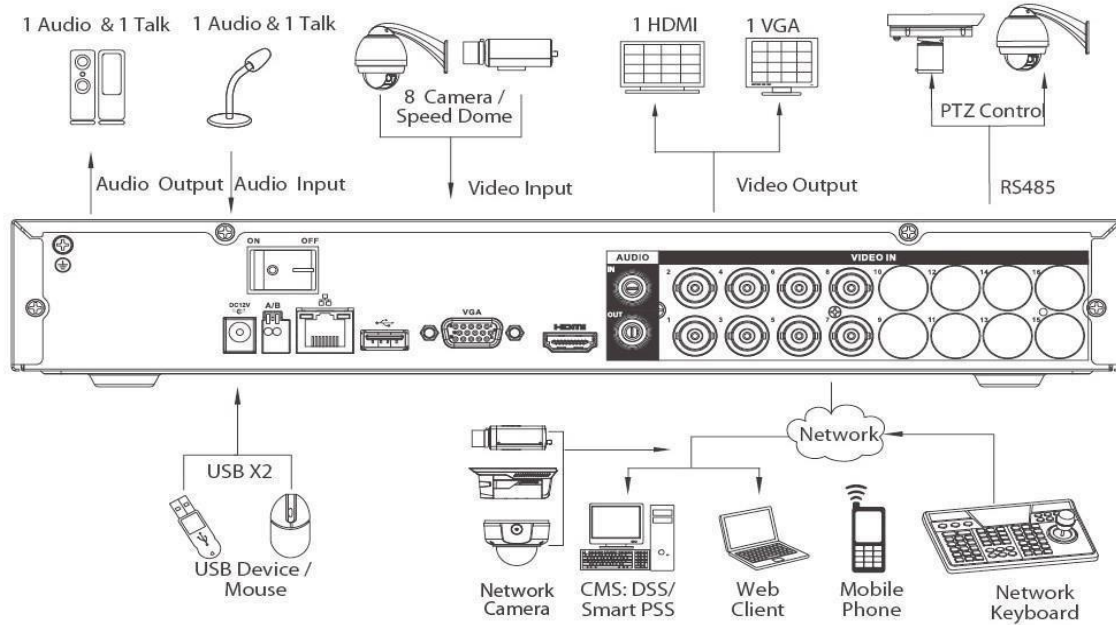

*Takes HD-S2-7108H as an example

社名 / 新光 株式会社
SK-COMPANY CO.,LTD

本社所在地 / 〒173-0032
東京都板橋区大山西町 2 - 3 **SKビル 1F**

TEL / +81-8032785551
FAX / +81-33972-0689

Distributor: