

# HD-V2-5204/5208/5216A

## 4/8/16CH Tribrid 720P-Pro 1U HD DVR



### Features

- > Support HD/Analog/IP Video input
- > H.264 dual-stream video compression
- > HCVR5204/5208/5216A-V2: All channel 720P realtime or 1080P non-realtime recording
- > 4/8/16 channel synchronous realtime playback, GRID interface & smart search
- > HDMI/VGA simultaneous video output
- > Support 2 SATA HDDs up to 8TB, 2 USB2.0
- > 3D intelligent positioning with PTZ dome camera
- > ONVIF Version 2.3 conformance
- > Support Multi-brand network cameras: Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotech , and etc.
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)

### Technical Specifications

Model		HD-V2-5204/5208/5216A	HD-V2-5204/5208/5216A	
<b>System</b>				
Main Processor		Embedded processor		
Operating System		Embedded LINUX		
<b>Video</b>				
Input		4 channel, BNC	8 channel, BNC	16 channel, BNC
Standard	HDCVI	1080P/720P HD Camera		
	Analog	NTSC/PAL		
	IP	Support 2ch 1080P/720P IP Camera		
<b>Audio</b>				
Input		4 channel, RCA		
Output		1 channel, RCA		
Two-way Talk		Reuse audio input/output channel 1		


## HD-V2-5204/5208/5216A

<b>Display</b>			
Interface		1 HDMI, 1 VGA	
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768	
Display Split		1/4	1/4/8/9
Privacy Masking		4 rectangular zones (each camera)	
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
<b>Recording</b>			
Video/Audio Compression		H.264/G.711	
Resolution		1080P(1920×1080)/720P(1280×720)/960H(960×576/960×480)/D1/4CIF(704×576/704×480) / CIF(352×288/352×240) / QCIF(176×144/176×120)	
Record Rate	Main Stream:	1080P(1~12/15fps)/720P/960H/D1/HD1/2CIF/CIF(1~25/30fps)	
	Extra Stream	CIF/QCIF(1~25/30fps), D1(1~12/15fps)	
Bit Rate		48~4096Kb/s	
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop	
Record Interval		1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
<b>Video Detection &amp; Alarm</b>			
Trigger Events		Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Spot, Snapshot, Buzzer & Screen tips	
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Alarm Input		4 channel	8 channel
Relay Output		3 channel	
<b>Playback &amp; Backup</b>			
Sync Playback		1/4	1/4/9
Search Mode		Time/Date, MD & Exact search (accurate to second)	
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode		USB Device/Internal SATA burner/Network	
<b>Network</b>			
Ethernet		RJ-45 port (10/100M/1000M)	

# HD-V2-5204/5208/5216A

Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P		
Max. User Access	128 users		
Smart Phone	iPhone, iPad, Android, Windows Phone		
<b>Storage</b>			
Internal HDD	2 SATA ports, up to 8TB		
<b>Auxiliary Interface</b>			
USB Interface	2 ports(1 Rear), USB2.0		
RS485	1 port, For PTZ control		
<b>General</b>			
Power Supply	DC12V/4A	DC12V/4A	DC12V/5A
Power Consumption	15W(without HDD)		
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa		
Dimension(W×D×H)	1U, 375mm×285mm×55mm		
Weight	2.35KG(without HDD)		

## System Connection

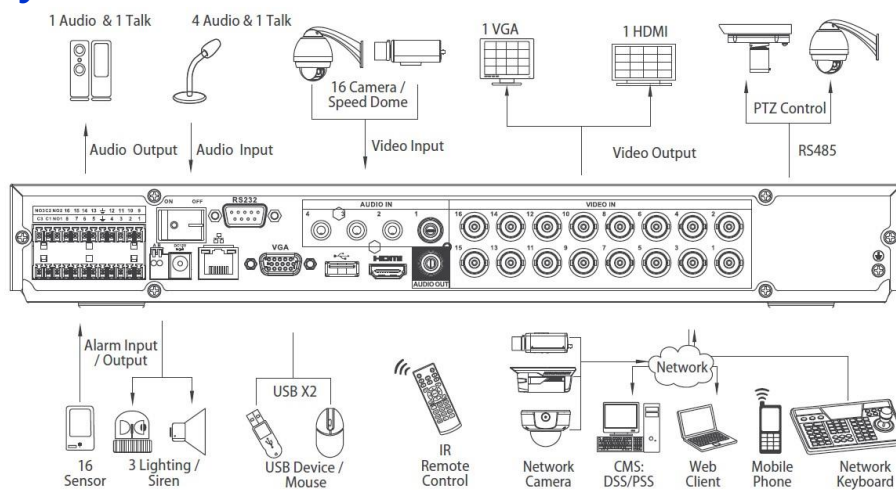

社名 / 新光 株式会社  
SK-COMPANY CO.,LTD

本社所在地 / 〒173-0032  
東京都板橋区大山西町 2 - 3 SKビル 1F

TEL / +81-8032785551  
FAX / +81-33972-0689

Distributor: