

IP-ADZW1020S

1.3Mp HD 20x Network IR Housing Zoom Camera



Features

- 1.3Megapixel CMOS brings excellent image quality and high sensitivity
- 20x optical zoom lens realizes instant AF & quick zoom
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@1.3M resolution
- DWDR, Day/Night(ICR), DNR (2D&3D),Auto iris, Auto focus, AWB, AGC,BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- Built-in 2/1 alarm in/out
- Micro SD memory
- IR Distance up to 100m
- Wide-range temperature application: -40°C ~ +70°C

Technical Specifications

| | |
|--------------------------|----------------------------------|
| Model | IP-ADZW1020S |
| Camera | |
| Image Sensor | 1/3" CMOS |
| Effective Pixels | 1280(H) x 960(V), 1.3 Megapixels |
| Scanning System | Progressive |
| Electronic Shutter Speed | 1/1 ~ 1/30,000s |
| Min. Illumination | B/W: 0.005 Lux/F1.4 |
| S/N Ratio | More than 50dB |



IP-ADZW1020S

| | | |
|------------------------|--|-------------------------|
| Video Output | BNC(1.0Vp-p/75Ω), PAL / NTSC | |
| Camera Features | | |
| Day/Night | Auto(ICR) / Color / B/W | |
| Backlight Compensation | BLC / HLC / DWDR | |
| White Balance | Auto, ATW, Indoor, Outdoor, Manual | |
| Gain Control | Auto / Manual | |
| Noise Reduction | 2D / 3D | |
| Privacy Masking | Up to 24 areas | |
| Digital Zoom | 16x | |
| Lens | | |
| Focal Length | 4.7mm ~ 94.0mm (20x Optical zoom) | |
| Max Aperture | F1.4 ~ F2.6 | |
| Focus Control | Auto/ Manual | |
| Angle of View | H: 54.1° ~ 3.2° | |
| Close Focus Distance | 10mm ~ 1000mm | |
| Video | | |
| Compression | H.264 / MJPEG | |
| Resolution | 1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240) | |
| Frame Rate | Main Stream | 1.3M/720P(1 ~ 25/30fps) |
| | Sub Stream | D1/CIF(1 ~ 25/30fps) |
| Bit Rate | H.264: 56K ~ 8192Kbps, MJPEG: 56K ~ 20480Kbps | |
| Audio | | |
| Compression | G.711a / G.711u(32kbps) / PCM(128kbps) | |
| Interface | 1/1 channel In/Out | |
| Network | | |
| Ethernet | RJ-45 (10/100Base-T) | |
| Protocol | IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour | |
| ONVIF | ONVIF Profile S | |
| Max. User Access | 20 users | |
| Smart Phone | iPhone, iPad, Android, Windows Phone | |
| IR Distance | 100m | |

IP-ADZW1020S

| Auxiliary Interface | |
|---------------------|-----------------------|
| RS485 | 1 port |
| Memory Slot | Micro SD, Max 64GB |
| Alarm | 2/1 channel In/Out |
| General | |
| Power Supply | AC24V/ DC12V optional |
| Power Consumption | ≤50W |
| Working Environment | -40°C ~ +70°C / 99%RH |
| Ingress Protection | IP66 |
| Dimensions(W×D×H) | 404mm×164mm×132mm |
| Weight | 4kg |

Dimensions (mm)

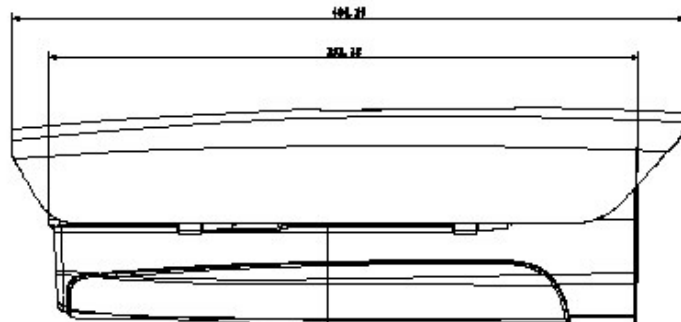


IP-ADZW1020S

Accessories (Optional)

For AC24V Model

| | | |
|---|---|---|
|  |  |  |
| AC-24V/3A | AC-PFB600W | AC-PFB601W |

For DC12V Model

| | | |
|---|--|--|
|  |  |  |
| AC-12V/5A | AC-PFB600W | AC-PFB601W |

社名 / 新光 株式会社
SK-COMPANY CO.,LTD

本社所在地 / 〒173-0032
東京都板橋区大山西町 2-3 SKビル 1F

TEL / +81-8032785551
FAX / +81-33972-0689

Distributor: