



# Multibio700

Access Control  
Multi-Biometric Device



## Features

### Standard Features

- Reliable, durable & highly accurate optical
- Built-in Serial and Ethernet ports sensor
- Built-in Wiegand input/output ports
- Less than 1 second user recognition
- Stores 1500 facial templates
- Built-in USB port allows for manual data transfer
- Reads Face, Fingerprint, Pin's and/or RFID card

### Enhanced Features

- Audio - Visual indications for valid / invalid entries
- Supports 50 time zones, 5 groups and 10 combinations
- Tamper switch
- Integrated 125kHz RFID proximity reader

### Software

- Access Control Management 3.5

### Related Products



RFID Cards



Exit Button



Maglocks



Mini UPS

### Alternative Products



VF380




VF680


## Specifications

- Facial Capacity: 1,500 templates
- Fingerprint Capacity: 2,000 templates
- Transaction Capacity: 100,000 transactions
- RFID Card Capacity: 10,000 cards
- Sensor: Optical Sensor
- Built-in Card Reader: 125kHz RFID proximity reader
- Communication: RS485, TCP/IP, USB-host
- Wiegand Ports: Output any bits
- Access Control interfaces: 3rd party electric lock, door sensor, exit button, door alarm
- Access Control functions: 50 time zones, 5 access control groups, 10 combinations
- Power Supply: 12V DC 3A
- Operating Temperature: 0 °C - 45 °C
- Operating Humidity: 20% - 80%
- Dimension: 87 X 212 X 86mm

## Dimensions

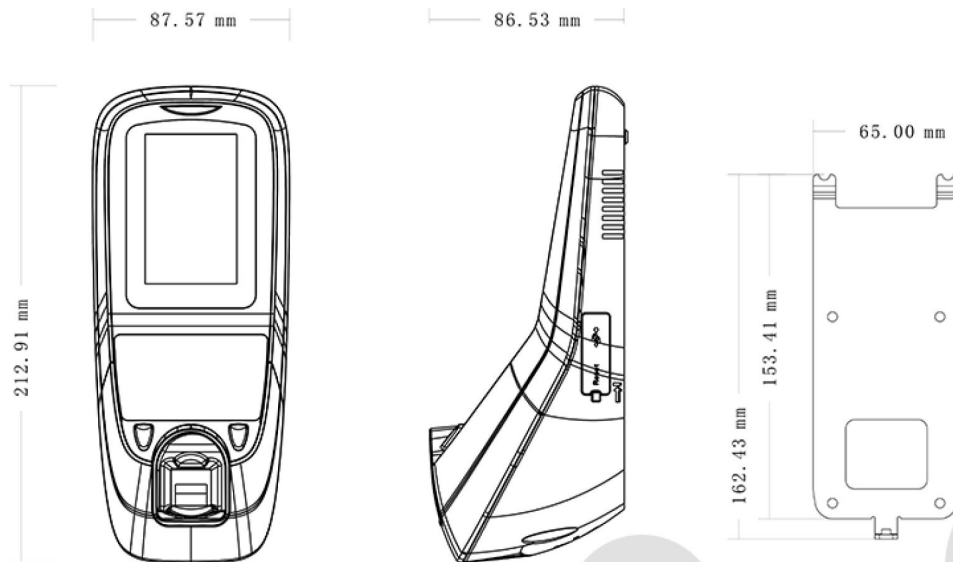

## Configuration

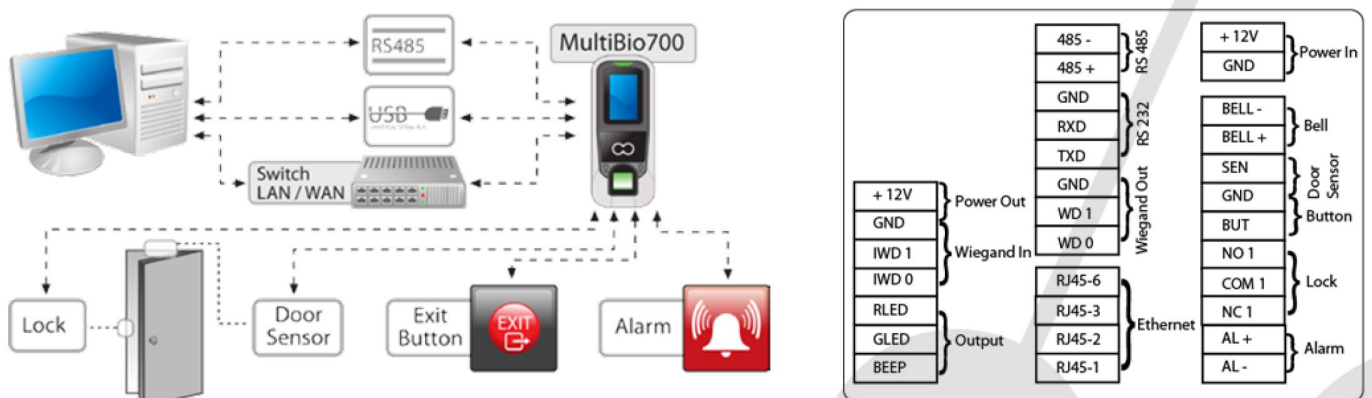

TEL / + 81-8032785551  
FAX / + 81-33972-0689

社名 / 新光 株式会社  
SK-COMPANY CO.,LTD

本社所在地 / 〒173-0032  
東京都板橋区大山西町 2-3 SKビル 1F